

At this time we would like to thank you for purchasing the KR-210S. This product has adopted the current 2.4GHz FHSS system that allows the use of multiple channels without the need to search for an available open channel like the bands of a crystal system. This product corresponds to the transmitters that are sold by our company, listed below. Please read this instruction manual before using this product. Also please read the instruction manual of the transmitter being used.




Corresponding

Transmitter EX-1 KIY
RF-Module RF-903FH / RF-904FH

Technical Specifications

D.D.S. compatible Response Mode Compatible (ULTRA / ADVANCED / SUPER / NORMAL / DD ADVANCED / DD SUPER / DD NORMAL)
Fail safe system ,Number of Channels : 2CH ,Power source : 4.8v-7.4V
Size : 28×18.3×18.5mm Weight : 7.8g

Name of Parts

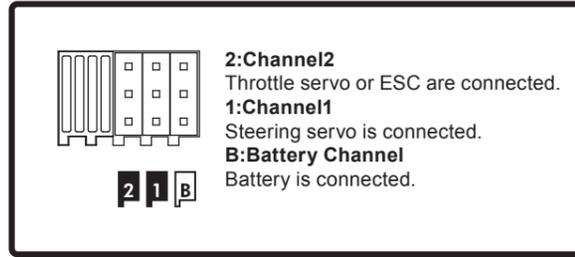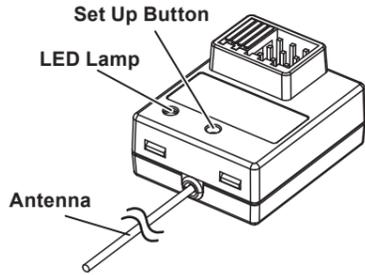

For your safety, please note the handling and use of this product.

Warning

The contents of this display show a possibility of death or where a serious injury may occur Warning or a highly substantial damaging accident may occur.

- This product is manufactured for surface use radio controls. *Discontinue use for all other purposes. Discontinue use in the event of a thunder storm. *There is danger of a lightning bolt striking the antenna of the transmitter.
- Discontinue use when consuming alcohol or medication that may hinder concentration or judgement. *Unexpected accidents are caused with a judgement mistake.
- When rain and puddles are present, please discontinue use. *There are times when water enters into the equipment and control will be lost.
- Only use the batteries specified in the instruction manual of the transmitter.
- To turn the system on, start by turning on the transmitter then the receiver. To turn off the system, turn off the receiver first, then the transmitter in this sequence.
- Please be sure to use only our products for the transmitter and servos. *Concerning the damage and the like, which is generated when combining products that are not our company's genuine products we do not owe responsibility.
- Altering the transmission module is inhibited by law and is subjected to penal code violations. Resolution remodelling of all products may result in the cause of a short and other accidents. In addition, if this product is altered we will refuse repair service.
- Please do not use this product inside an airplane, hospital, near any automatic control equipment, medical electrical machinery and apparatus such as fire alarms. In addition with respect to the law, if this product effects other radio equipment and electronic equipment, use must be discontinued at once.

Attention

This displays shows the possibility or a substantially damaging accident which can cause Attention injury.


- Please avoid storage in a place of high temperatures and high humidity because it may cause the breakdown,damage and deformation of the product.
- Please note when using with an engine model, place where exhaust and the waste oil will not come into contact with the product.
- *In case of submerging in oil or water, please send it out for repair.
- This product's performance is designed for use in the shown specified usage which is based on this instruction manual and the instruction manual of the transmitter which is used. When the instructions are not understood, please contact our service department for advise.
- After verifying the safety of use, think of all the accidents possible and please enjoy with responsibility.

Our company cannot owe responsibility from the nature of the radio control models And the customer assumes all responsibilities that result from this product being used.

Antenna Installation Location


For electric powered models.

Please keep distance to the receiver site, due to noise sources of the battery, motor, ESC, etc. If possible. Also keep away power condensers and shotki diodes that generate noise from the receiver antenna if possible.



Installing the Antenna

- Please use plastic mounts and a plastic antenna tube.
- Please do not use a metal antenna mount because it will create noise and problems.
- To protect the main antenna, insert the antenna into the antenna tube. Also please do not disconnect or cut the antenna. This will cause loss of signal.




Caution

Please do not cut the antenna wire. You will receive less range. Please place antenna away from receiver battery, ESC, motor and silicon wires and any other noise source. The antenna wire for the receiver requires special attention.


Pairing

When using the receiver for the first time, the receiver must store the ID number of the module and 'pairing' of the receiver and module is necessary. Pairing must be performed when the module or transmitter that is used is changed. When multiple receivers are used, each receiver must go through the pairing process at least once.

For RF-901S/RF-902S

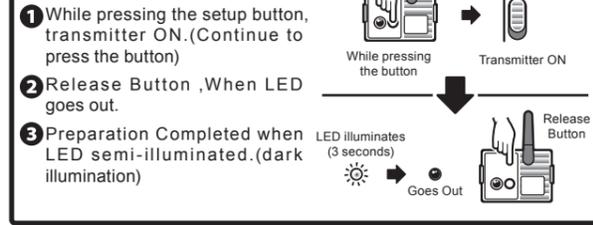

For EX-1 KIY

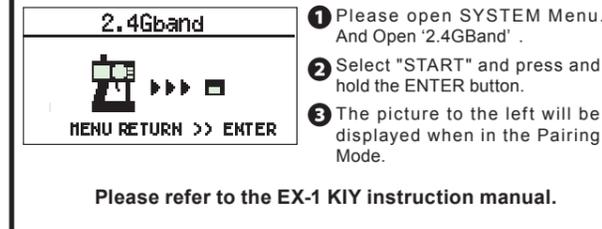

Fail-safe function

Fail-safe is when the receiver loses the radio signal of the transmitter, and the function keeps channel 2 (throttle) in an optional position. The configuration is usually full brake or neutral.


Warning

Please be sure to set the fail-safe.

Configuration instructions

Turn on the transmitter and the receiver and verify operation.

On the transmitter, hold the throttle to the position you would like it to be set to. While holding the position, press the setup button on the receiver.

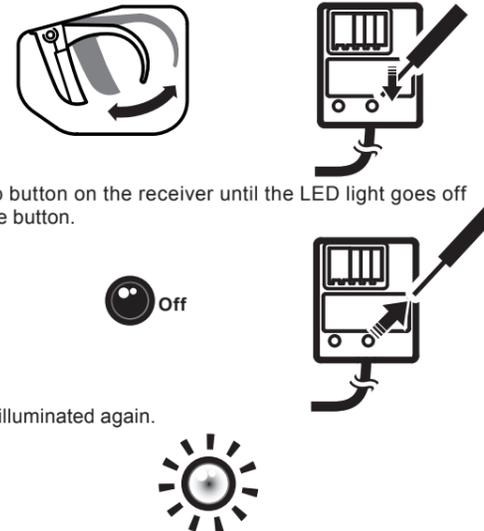


Fail-Safe setting is complete.

Caution

If you change the position of the fail-safe operation, please set again. We recommend to set it again even if you modify the car engine brake linkage.

- 1: Pairing mode for the transmitter or RF module. The models differ for each. Please refer to the manual of each model and the figure to the left.
- 2: Prepare the transmitter or RF module when you are ready to pair the KR-211FH. (If you are using an electronic speed controller in your car, make sure you have the power connected and turned on when pairing.)
- 3: Hold the setup button on the KR-211FH and turn on the power. Once the LED is lit, release the button and the LED will go off and back on. Pair is complete.
- 4: Once you've completed the pairing, turn off the power to the receiver and transmitter and verify connection by turning the system on again.

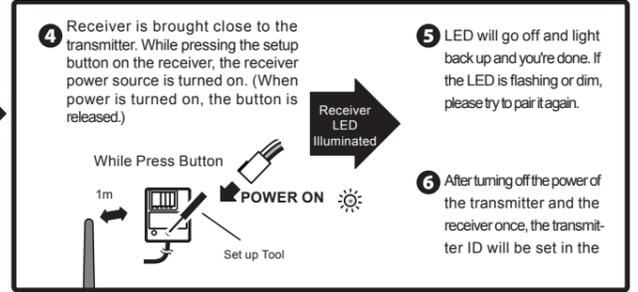

CAUTION

- If you are having difficulties pairing, make sure that you are not around a wireless LAN or microwave. If you are please move to a different location and try again.
- After pairing is complete, Please turn off in the order of receiver transmitter.
- Please keep the distance 1m between transmitter and receiver when you pair/bind them.

About Repairs

If you request a repair, please report the fault in as much detail as possible. This will aid in knowing the problem and parts to be used and repair time.

When you believe you need service.

- Please refer to your manual once more and please inspect.
- When you do not understand something, please inquire our service department.
- When inquiring to our service department about a breakdown, please include as much detail as possible of the contents mentioned below about your problem.
- Name of products (battery, car, transmitter & motor) used.
- When breaking down, usage condition and description of breakdown condition.
- Your address, name and telephone number.
- When a repair is being requested, please be sure to send the memo which includes the above mentioned contents in as much detail as possible.