

ICS USB ADAPTER HS **Please read first.**

Thank you very much for purchasing the ICS USB adapter HS.

The ICS USB adapter HS is a USB serial conversion device which exceeds the maximum transmission speed of 115k bps of the conventional ICS USB adapter which attained the transmission speed of 1.25Mbps.


Please download the driver installation manual from this guide and our homepage before use.

Please refer often to these directions for use.


The contents of the product

Please confirm the contents included in this product.

ExtentionCable Black&White(length:400mm)




ICS USB Adapter HS




ICS Cable for MiniZ MR03



Cable(length:100mm)

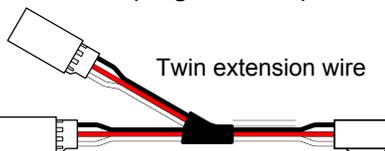

Twin extension wire



All wire Connected Cable
(length:1500mm)

ICS USB adapter HS Spec.

- | | | | |
|---------------------|------------------------------------------|-----------------------|---------------------------------|
| ○Size : | 52(connector area is included)x15x9 (mm) | ○Correspondence USB : | USB1.1/2.0 |
| ○Weight : | 6.0 (g) | ○Transmission speed : | 300-1.25Mbps(TTL level) |
| ○Correspondence OS: | Windows XP later | ○supply voltage: | 5V(depends on the connected PC) |

The ICS USB adapter HS is inserted into a USB port and the installation wizard for the driver is started.

Install the driver by referring to the installation manual.

Once installation is complete, the use of the device will be possible using a COM port.

About a driver file

The manual which explained the needed driver file and the installation method in detail is downloadable from our homepage.

Download Page http://www.kopro.co.jp/en/supports/view/15?product_id=3031

The various software which operates each apparatus is downloadable from our Web Site.

Attention

Hardware requirement: personal computer with Windows XP or later (the use of emulator or a virtual machine operation cannot be guaranteed.)

Also, a USB port (1.1 or 2.0) is required

When it connects through a USB hub, it may not operate normally.

In order to have a driver, various manuals, etc. downloaded, Internet connectivity environment is required.

About an external power supply: An external power supply is required for the product corresponding to almost all ICS (s) because of the operation. What fulfills the conditions of the voltage of the apparatus to be connected for operation is a required power supply source.

Depending on apparatus, from this machine side, a power supply may be supplied and it may communicate.

Please read the manual of each apparatus, and the description of software for details.

Notes : Kondo Kagaku Co.,Ltd has a design of the copyright about this manual, a logo, or some icons, and other - OFF of legal rights.

Please do not apply the voltage besides allowable voltage.

When a USB hub is used, it may not operate normally.

Our Web Site

<http://www.kopro.co.jp>

KONDO KAGAKU CO.,LTD.

KO PROPO